
OEM

Technical Datasheet

Product Code: FSSR4BKM **Description:** 250V 20A 4 Pole Male Screw Connector with Strain Relief



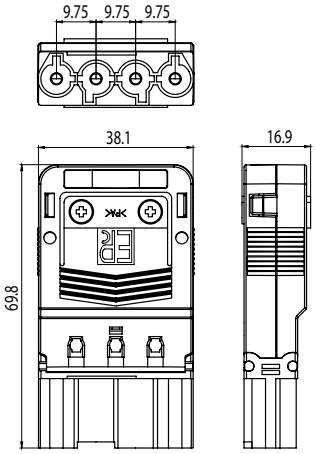

General Information

Rating	20A 250V~
Colour	Black
Materials	Body: Polyamide (PA6/6 V0) Contacts: Brass Silver Plated
Number Of Poles	4
Terminal Type	Screw (Cross Head
Screw Torque	Terminals: 0.5Nm, Cover Screws: 0.6Nm
Impulse Voltage	5kV
Terminal Cable Size	1.5mm² Min. - 2.5mm² Max.
Strain Relief Cable	7.5mmØ Min. - 10.5mmØ Max.
Cut & Strip Lengths	Cut: Live & Neutral: 29mm, Earth: 36mm Stripped: 8mm
Ferrule / Bootlace	2.7mmØ Max.
Temperature Rating	100°C
Ingress Protection	IP20 (IP40 When Plugged In)
Compatible Female Socket	FSSR4BKF

Additional Information Installation couplers are only intended for connection and disconnection without load. This installation coupler is not suitable for installation in readily accessible areas.

Standards EN61535: 2008 +A1: 2013 Compliant When Locked Together
EN 60335-1

250/600V T110 - 2,5mm² 20A (Canada 15A);1,5mm² 10A

Scolmore Park, Landsberg, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7XB United Kingdom
T: +44 (0)1827 63454 | **F:** +44 (0)1827 63362
E: sales@scolmore.com | **W:** scolmore.com

Errors & Omissions excluded.
Specification is subject to change without notice.