



Tx Wall Cabinet

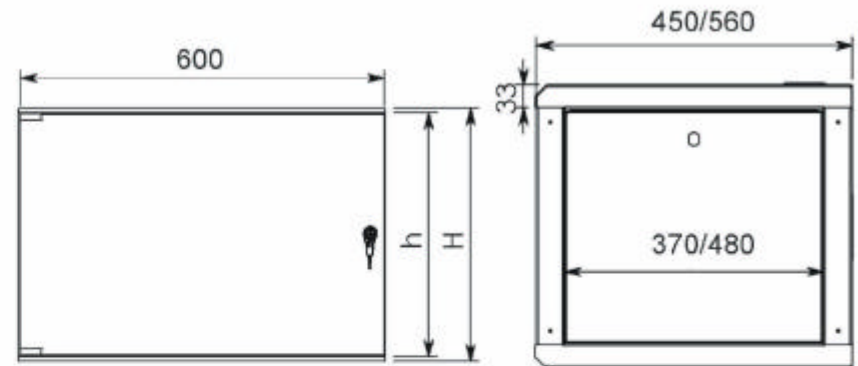

Rear door is used for mounting plate
 • Easy
 • Straight
 • Fast installation
 • Low manpower

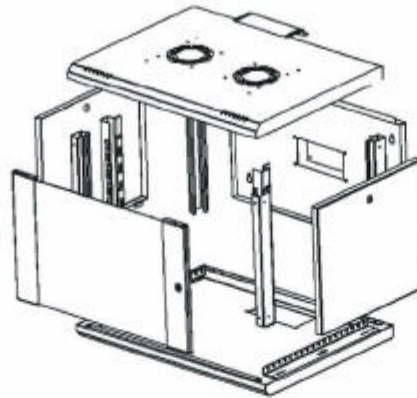

Explode View

Front View

Side View

FEATURES

• Easy Access

Front door features a full-length smoked and shatterproof glass door with decorative accent trim reinforced with left/right metal frames and integral locking mechanism. Side doors; lockable, removable complete with a locks. Rear door is lockable & removable and also used as mounting plate at the same time. When mounting the enclosure, rear door is removed and mounted directly to wall and enclosure plug-in to the rear door. This results in a fast installation, low manpower and cost-effective solution.

• Cable access

Multiple cable entry points on top(1ea) and bottom(1ea), provide maximum versatility. There is a rubber edge sliding cover mechanism that protects and fixes the cables. On the rear door, there is also a cable entry hole closed with cover. When it is used, it is replaced with one of top/bottom rubber edge sliding cover mechanism.

• Construction

Rigid welded frame construction is in steel sheet. Corner of bases have welded sockets on each corner that are tightly fixed into the columns giving maximum stability.

Frames are made with 24-fold design for increased stability. Vented top cover provide passive heat transportation via convection. There are vented fan holes suitable for cooling unit. (see accessories)

19" mounting angles (front/2ea.) allow for flexible configuration and adjustable in depth. Extensive range of accessories

width=600 mm. depth=450 mm.


Order No.	U (44,45)	h inside height (mm)	H outside height (mm)	Weight (kg)
7		314	381	21 kg.
9		403	470	23 kg.
12		536	604	26 kg.
16		714	778	30 kg.
20		892	960	35 kg.

width=600 mm. depth=560 mm.

Order No.	U (44,45)	h inside height (mm)	H outside height (mm)	Weight (kg)
7		314	381	25 kg.
9		403	470	28 kg.
12		536	604	32 kg.
16		714	778	36 kg.
20		892	960	41 kg.

(Double Sectioned) width=600 mm. depth=(110+450) mm.

Order No.	U (44,45)	h inside height (mm)	H outside height (mm)	Weight (kg)
7		314	381	27 kg.
9		403	470	31 kg.
12		536	604	35 kg.
16		714	778	39 kg.

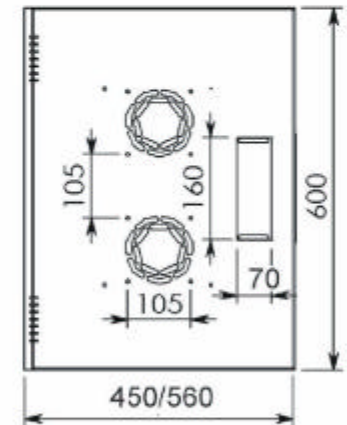

Top View

